HOHMANN & BARNARD, INC.

Weep Holes/Vents

Mortar Trap™ Weep Vents



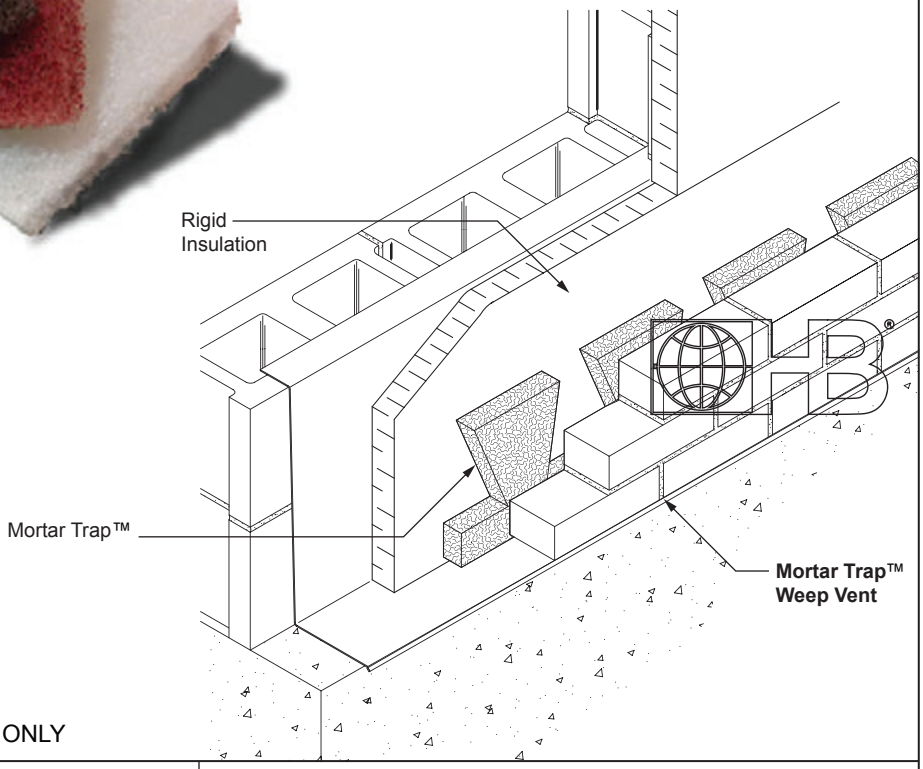

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

Mortar Trap™ Weep Vents

Description: A 100% re-cycled polyester plastic non-woven mesh vent which is treated with a flame retardant and ultra-violet inhibitors.

Use: Used in vertical joints between brick masonry in masonry wall construction to provide for the drainage of moisture and promotion of air flow. The weep vents also prevent insects from entering through the openings.

Installation: Install the weeps in vertical joints (head joints) of the brick masonry every 24 inches at the flashing level for moisture evacuation and air flow. Weeps should be installed at both the top and the bottom of the wall for equalization of air pressure.

- A green product- 100% post consumer recycled material
- Qualifies for LEED credits
- Meets AATCC Test Method 30 (Anti-fungal/Anti-rot)
- Zero Microbial Activity

Size:

☐ Standard Size: 2-5/8"x3-1/2"x1/2"

Colors:

☐ Almond ☐ Gray ☐ Tan
☐ Brown ☐ Red ☐ White

Standard Packaging:

- 200 weeps/Box
- 90 Boxes/Pallet

IMPORTANT: Since each construction project is unique, the appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other appropriate professionals who are familiar with the specific requirements of the project in question.

This drawing and/or data sheet is the confidential and proprietary information of Hohmann & Barnard, Inc. and is not to be reproduced, copied or disclosed, in whole or in part, without the prior written consent of H&B.

HOHMANN & BARNARD, INC.
CORPORATE HEADQUARTERS
150 Motor Parkway, STE 410
Hauppauge, NY 11788
T: 800-645-0616 | www.h-b.com

Branch/Subsidiary Locations:
ALABAMA - MARYLAND - NEW YORK
PENNSYLVANIA - TEXAS
CANADA

© 2013-2025

PRINT FORM
RESET FORM SAVE FORM
SAVE FORM LOCK & HIDE BUTTONS